


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CLOSED TOOL	6/10/11	TMD

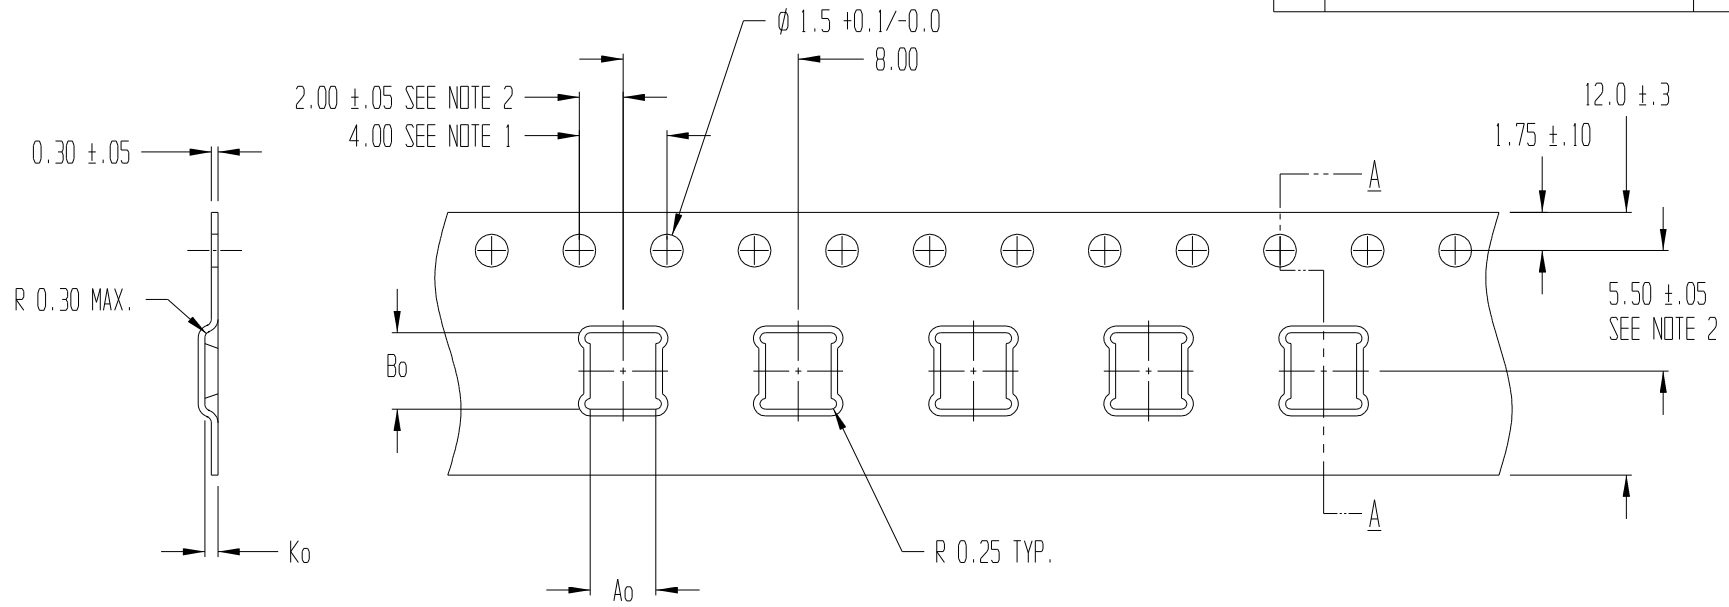

SECTION A - A

$A_o = 3.00$
 $B_o = 3.50$
 $K_o = 0.60$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



ADVANTEK[®]
 engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER IRBD02-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RJB	DATE 03/12/99	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-8435 / 7666.00	DWG NO. T102071AT	REV 2