


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CLOSED TOOL	3/24/11	BTH

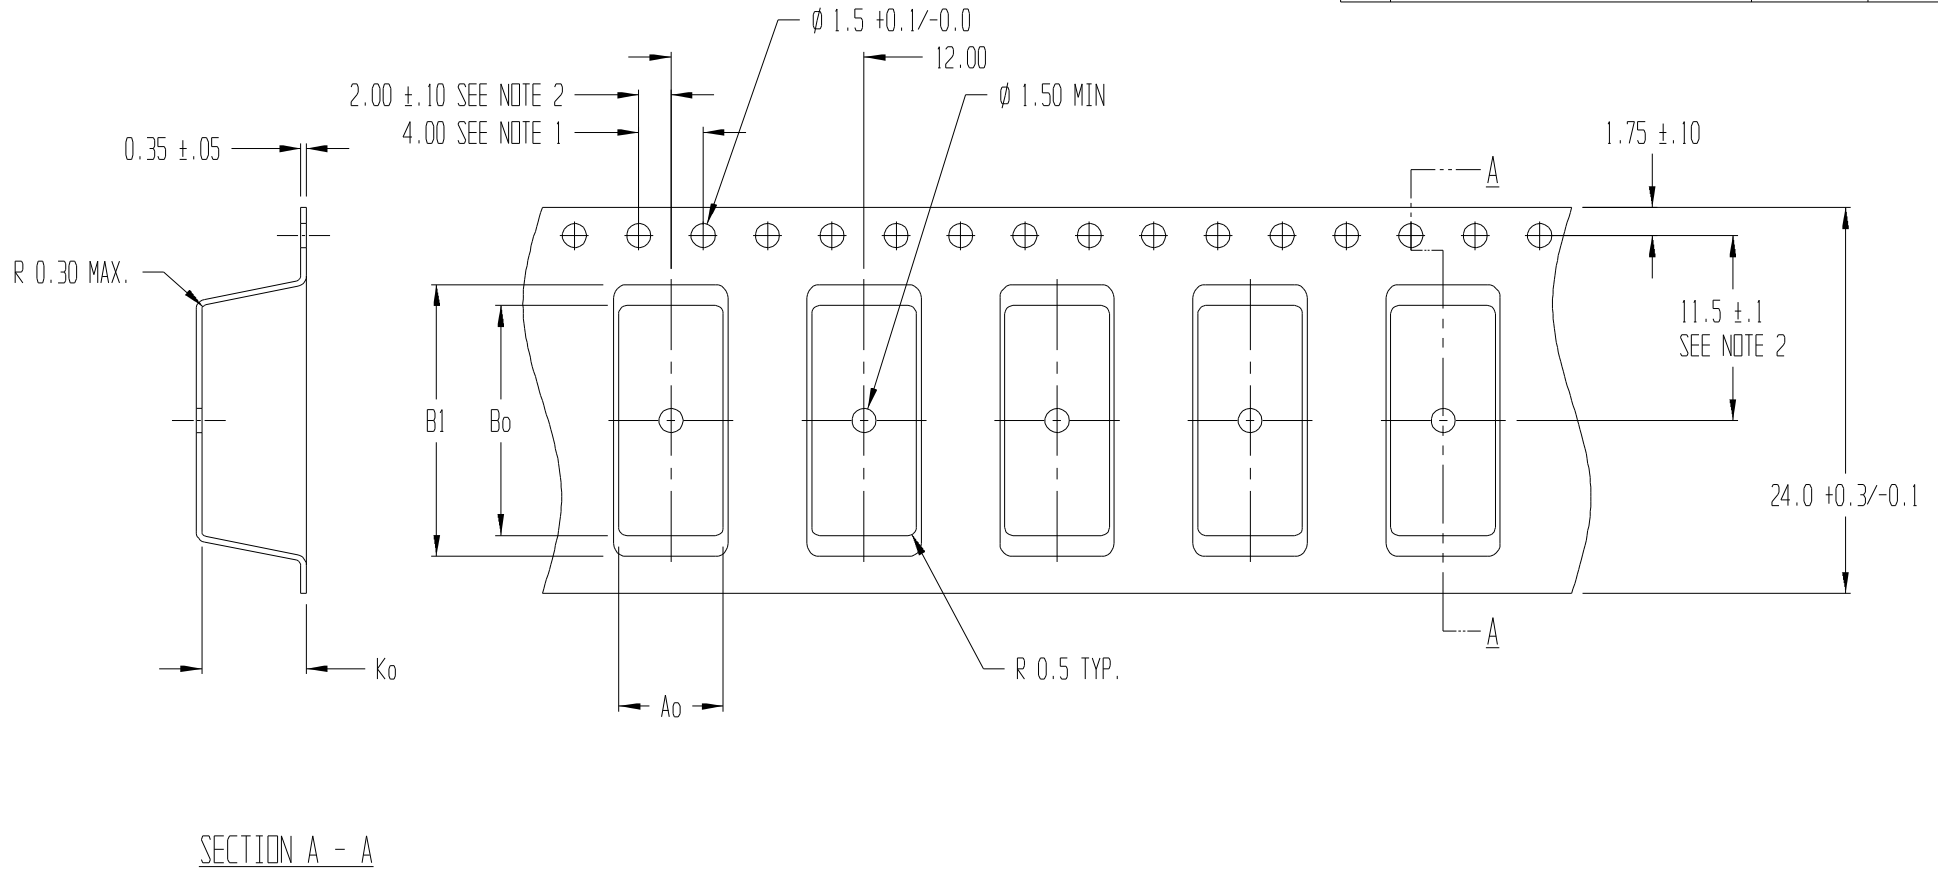

SECTION A - A

$A_0 = 6.50$   
 $B_0 = 14.30$   
 $B_1 = 16.90$   
 $K_0 = 6.50$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3.  $A_0$  AND  $B_0$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER SP-RES-B CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$		MATERIAL PS+C	DWG SIZE B
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY T.S.	DATE 7/15/1993	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. A0715-93-3/ 7417.00	DWG NO. A0715-93-3	REV 2