


| REVISIONS | | | |
|-----------|-----------------------|---------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | 13.6 was 13.9 | 9/10/97 | BTH |
| 2 | B1 changed to callout | 3/12/04 | BTH |

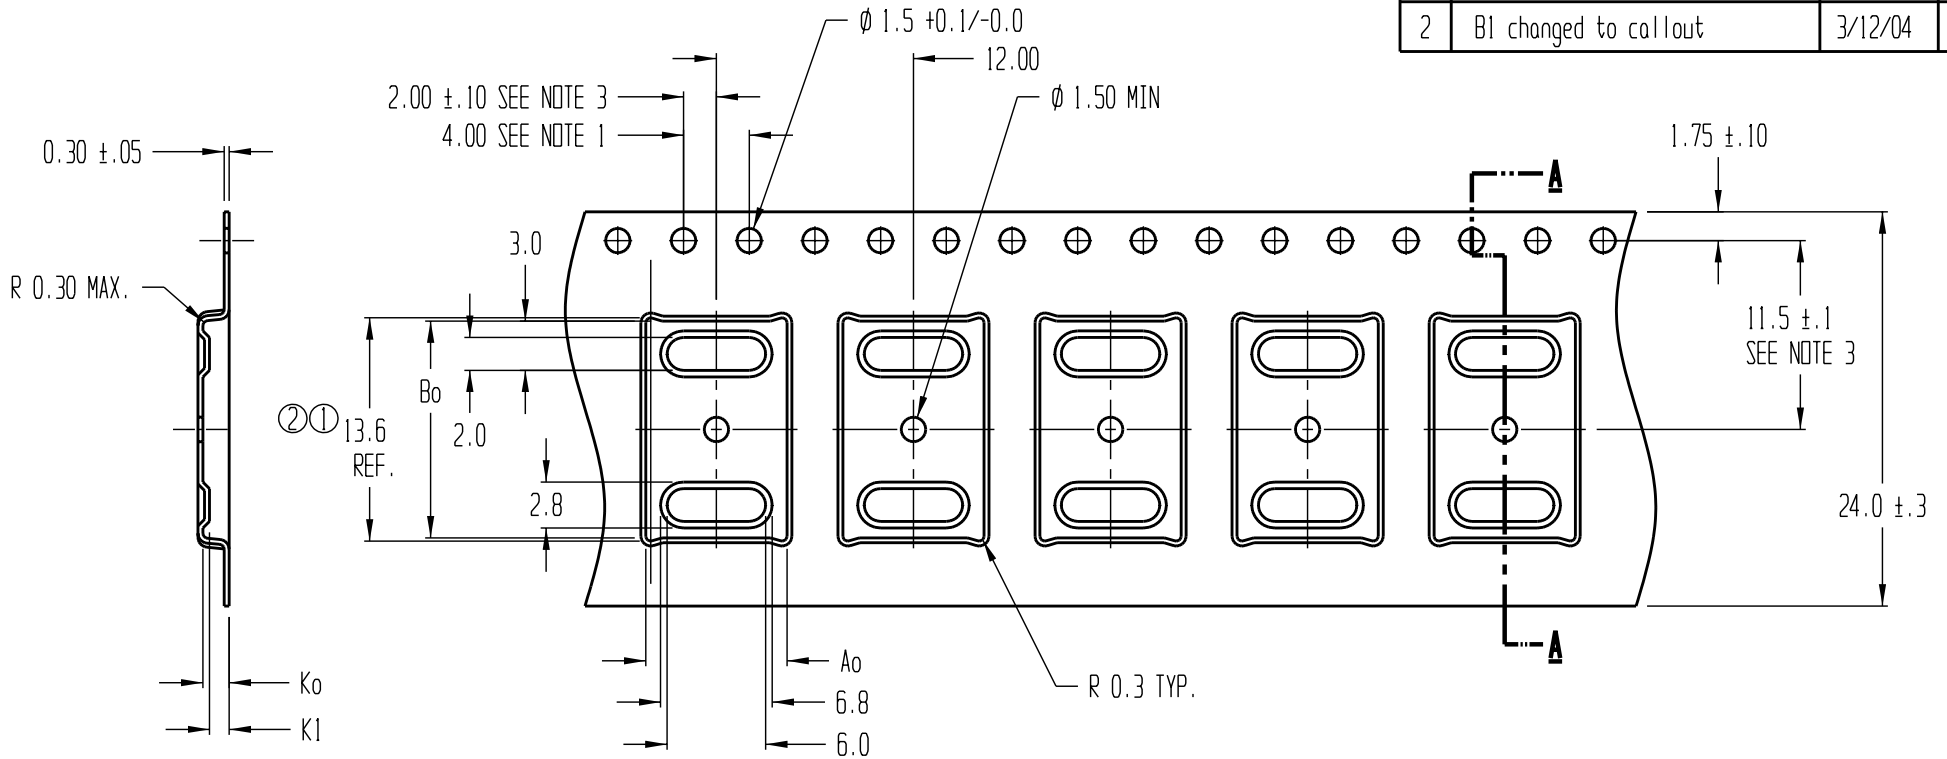

SECTION A - A

$A_0 = 8.60$
 $B_0 = 13.20$
 $K_0 = 1.60$
 $K_1 = 1.20$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE



| | | | |
|--|--------------------|---------------|--------------|
| ADVANTEK PART DRAWING NUMBER TSSP48-A | | | |
| CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | | MATERIAL PS+C | |
| ALL DIMENSIONS IN MILLIMETERS | | DWG SIZE B | |
| DRAWN BY T.S./BTH | DATE 6/16/94 | SCALE 3:1 | SHEET 1 OF 1 |
| REFERENCE NO. | DWG NO. A0819-94-2 | REV 2 | |